



## 1.2 Type number composition for servo-assisted versions

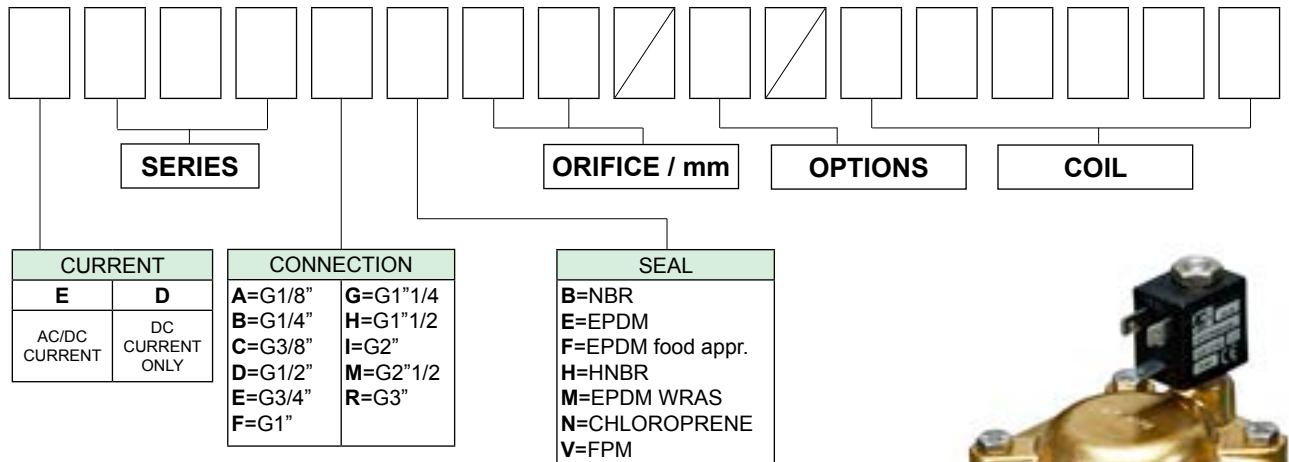

Example :  
**E207IV50///20E**

Solenoid valve suited to work in alternative or direct current 2/2 normally open, 2" BSP connections, FPM seal, orifice 50 mm, coil width 30mm, class F insulation, power consumption 15VA, voltage 220-230V 50/60Hz.


## Type number composition for direct-acting versions

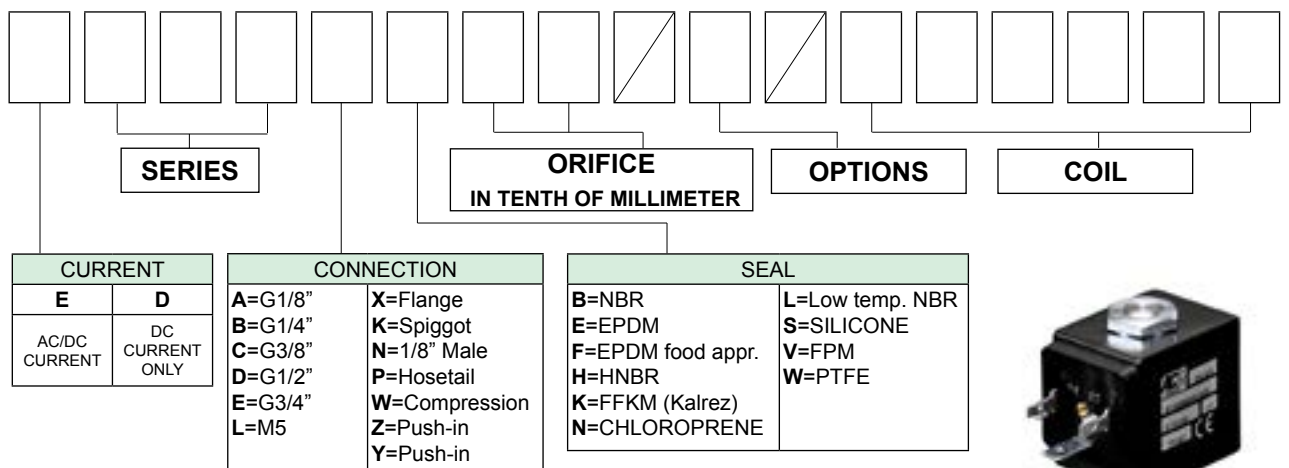

Example :  
**E105AB15///301**

Solenoid valve suited to work in alternative or direct current 2/2 normally closed, 1/8" BSP connections, NBR seal, orifice 1,5mm, coil width 22mm, class F insulation, power consumption 6,5W, voltage 24V DC.


## Type number composition for angle seat valves

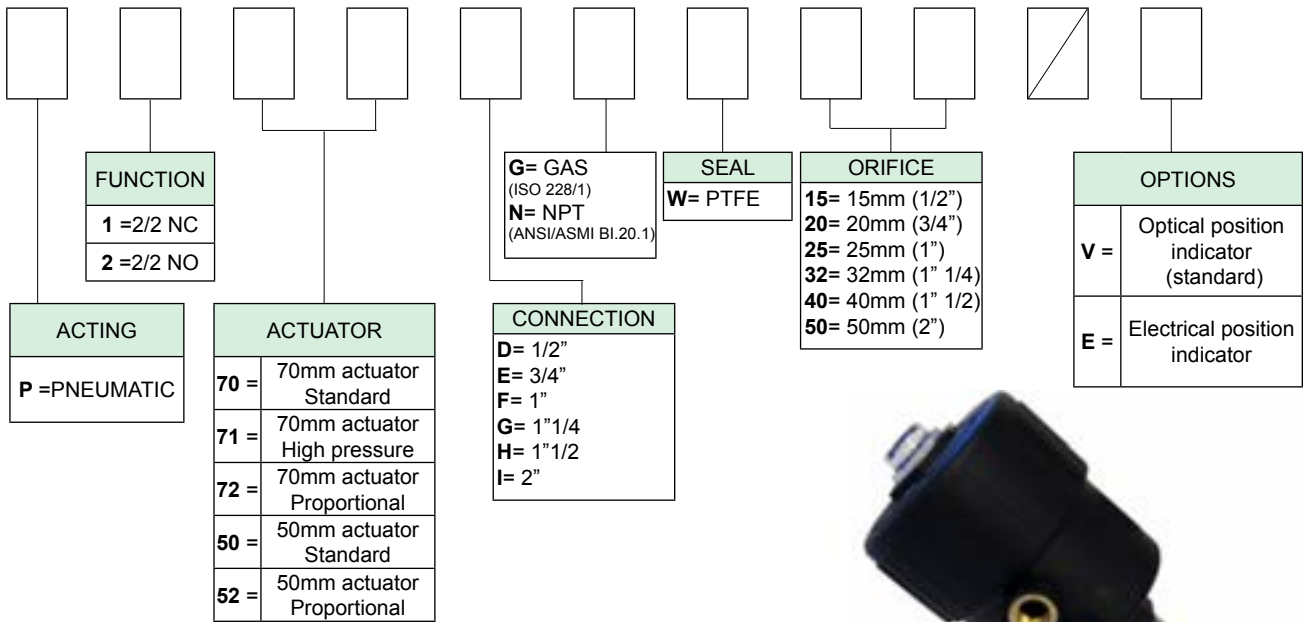

Example :  
**P170DGW15/E**  
 Angle seat valve 2/2 NC actuator Ø70,  
 G1/2" connection, PTFE seals, electrical position indicator



## Type number composition for coils

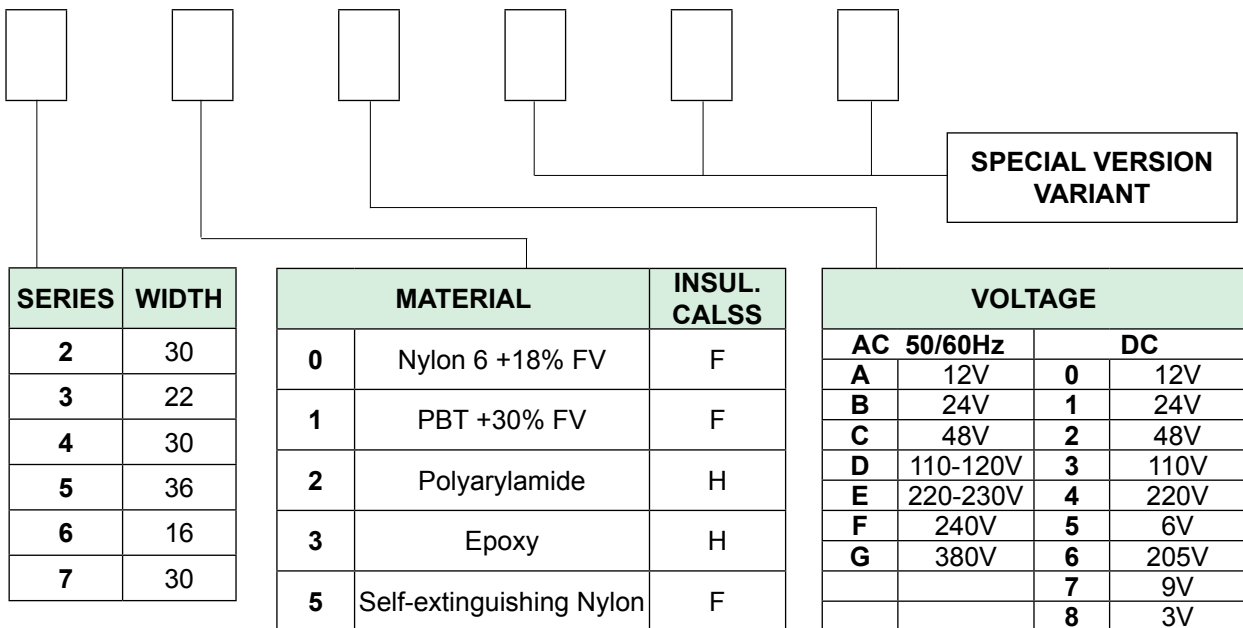

Example :  
**30B**  
 Coil width 22mm in Nylon 6+18% Fibre Glass  
 Insulation class F Voltage 24V 50/60Hz Power 8VA